


PanelMill 65

The PanelMill attaches to the tube outside diameter by means of custom or specific clamp type jaws that provide strong clamping action that minimizes chatter and vibration.

Rugged construction allows the tool's cutting blade to end prep quickly. Several cutter heads are available for tubes with up to 2-1/2" O.D. Both the clamp and cutter heads are extremely durable and easy to change.

The ratchet feed arm enables the operator to comfortably feed the tool during bevelling or facing. The PanelMill is suitable for small bore heavy wall tubes with a high percentage of chrome, stainless steel, and other exotic alloys. Standard and custom made blades are offered in a wide variety of angles and sizes.

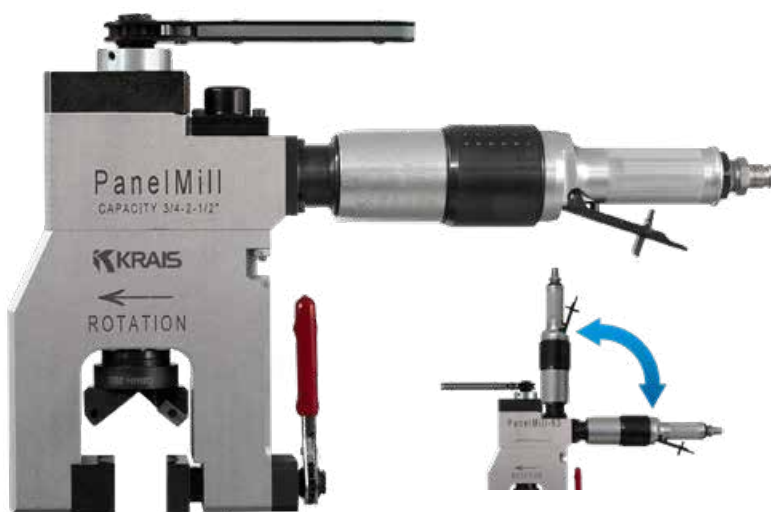

	WORKING RANGE [MM]		WORKING RANGE [INCH]		CLEARANCE		CLADDING REMOVAL		MEMBRANE UP TO		FEED STROKE		FREE SPEED [RPM]	TORQUE	
	MIN	MAX	MIN	MAX	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]		[NM]	[FT.LBS]
65EXT	19,0	63,5	0,75"	2,50"	70,0	2,75"	44,4	1,75"	51,0	2,0"	25,5	1"	100*	140	105
65EXT-M*	19,0	63,5	0,75"	2,50"	84,0	3,3"	63,5	2,50"	63,5	2,5"	25,4	1"	100*	140	105
101	50,0	101,0	2"	4"	122,0	4,8"	88,9	3,50"	122,0	4,8"	25,4	1"	100**	140	105

*65EXT-M working range +63,5 mm membrane; **65EXT and EXT-M optional free speeds are 35, 200 and 300 RPM; ***101 optional free speed: 40 RPM

	AIR USE		BODY WIDTH		BODY HEIGHT		WEIGHT	
	[CFM]	[M³/MIN]	[MM]	[INCH]	[MM]	[INCH]	[KG]	[LBS]
65EXT	55	1,3	50	1,96"	300	11,81"	10	22
65EXT-M	55	1,3	50	1,96"	320	12,60"	11	24
101	55	1,3	50	1,96"	350	13,78"	18	40

STANDARD JAWS

JAWS NO.	TUBE OD	
	[MM]	[INCH]
308 PM#2	25,40	1,000
314 PM#2	31,70	1,248
322 PM#2	38,10	1,500
330 PM#2	50,80	2,000
334 PM#2	57,10	2,248

OPTIONAL JAWS

JAWS NO.	TUBE OD	
	[MM]	[INCH]
300 PM#2	19,05	0,750
301 PM#2	20,00	0,787
304 PM#2	22,20	0,874
309 PM#2	25,00	0,984
312 PM#2	28,80	1,134
313 PM#2	30,00	1,181
318 PM#2	34,90	1,374
326 PM#2	44,40	1,748
331 PM#2	51,00	2,008
338 PM#2	60,30	2,374

PANELMILL-E

PanelMill E is electric version of PanelMill. A standard machine cover the same pipe sizes and comes with the same cutting head. The electric motor made by Makita with 3 stage planetary gear box made by KRAIS has variable speed control and produce enormous torque. Is interchangeable with pneumatic drive and can be purchased separately at any time.

Model ED-230-PME
 Free Speed.....115 RPM
 Power.....750 W
 Torque.....366 NM (280 Ft.Lbs)
 Feed Stroke20 mm (0,787")



PanelMill 65

UNIVERSAL CUTTER HEADS



50 MM (1,97'')
Head supplied with PanelMill 63. Designed to fasten wide range of cutting inserts.



63 MM (2,48'')
Head supplied with PanelMill 100. Designed to fasten wide range of cutting inserts.



BIT & HOLDERS
Universal cutter heads can hold a wide range of holders, with a bunch types of bits.

→ TABLE PAGE 44

MACHINING IN EVERY POSITION



OUTSIDE BEVELLING HEAD



BIT: HSS 6% COBALT
DEGREE: 37,5°

Outside beveling head for machining tubes without membranes in a boiler water wall.

HEAD NR	TUBE CAPACITY			RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS
	[INCH]	[MM]	BWG	MIN	MAX	MIN	MAX		
OBPMH-254	1,000	25,40	11-23	0,315	1,339	8,00	34,00	WRIL	2
OBPMH-285	1,125	28,58	11-23	0,307	1,331	7,80	33,80	WRIL	2
OBPMH-317	1,250	31,75	8-23	0,433	1,457	11,00	37,00	WRIL	2
OBPMH-381	1,500	38,10	6-23	0,681	1,705	17,30	43,30	WRIL	2
OBPMH-444	1,750	44,45	6-23	0,929	1,953	23,60	49,60	WRIL	2
OBPMH-508	2,000	50,80	6-23	1,181	2,205	30,00	56,00	WRIL	2
OBPMH-571	2,250	57,15	6-23	1,433	2,457	36,40	62,40	WRIL	2
OBPMH-603	2,375	60,33	6-23	1,535	2,559	39,00	65,00	WRIL	2
OBPMH-635	2,500	63,50	6-23	1,654	2,677	42,00	68,00	WRIL	2

MEMBRANE REMOVAL HEAD



BIT: CARBIDE

Specially designed head for membrane removal and overlay head (cladding removal)

HEAD NR	TUBE CAPACITY		RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS
	[INCH]	[MM]	MIN	MAX	MIN	MAX		
PMRBMH-254	1,000	25,40	1,000	1,630	25,40	41,40	PO8	4
PMRBMH-288	1,125	28,58	1,134	1,764	28,80	44,80	PO8	5
PMRBMH-317	1,250	31,75	1,248	1,878	31,70	47,70	PO8	5
PMRBMH-381	1,500	38,10	1,500	2,130	38,10	54,10	PO8	6
PMRBMH-444	1,750	44,45	1,748	2,378	44,40	60,40	PO8	6
PMRBMH-508	2,000	50,80	2,000	2,630	50,80	66,80	PO8	7
PMRBMH-571	2,250	57,15	2,252	2,882	57,20	73,20	PO8	7
PMRBMH-603	2,375	60,33	2,374	3,004	60,30	76,30	PO8	7
PMRBMH-635	2,500	63,50	2,500	3,130	63,50	79,50	PO8	7
PMRBMH-762	3,000	76,20	3,000	3,630	76,20	92,20	PO8	8
PMRBMH-889	3,500	88,90	3,500	4,130	88,90	104,90	PO8	8
PMRBMH-101	4,000	101,60	4,000	4,630	101,60	117,60	PO8	9